

BP892 & BP892-TH



broadcast & production microphones

MicroSet® Omnidirectional Condenser Headworn Microphones



Features

- Industry-standard sound quality—extremely intelligible natural audio for stage/television talent, lecturers, houses of worship
- Handles high sound pressure levels with ease
- Microphone diameter of just 2.6 mm for the ultimate in low-profile, high-performance audio
- Comes equipped with AT8464 Dual-Ear Microphone Mount that converts single ear-worn MicroSet to a dual-ear-worn unit for maximum stability and comfort
- Locking 4-pin microphone output connector compatible with included power module and all Audio-Technica UniPak® body-pack wireless transmitters
- UniSteep® filter provides a steep low-frequency attenuation to improve sound pickup without affecting voice quality
- Offered in black and beige (-TH) models
- Also available in wireless models (without power module) terminated for use with all Audio-Technica UniPak® wireless systems and many other manufacturers' wireless systems

BP892 Description

The BP892 is a headworn condenser microphone with an omnidirectional polar pattern. It is designed to provide intelligible natural audio for stage and television talent, lecturers and houses of worship.

The microphone requires 11V to 52V phantom power for operation.

The microphone includes a 1.4 m (55") permanently attached miniature cable. Its free end connects to the provided AT8539 power module via a locking 4-pin connector. The connector is also compatible with all Audio-Technica UniPak® body-pack transmitters. The output of the power module is a 3-pin XLRM-type connector.

A recessed switch in the power module permits choice of flat response or low-frequency roll-off (via integral 80 Hz high-pass UniSteep® filter) to help control undesired ambient noise.

The microphone comes equipped with a power module, a cable clip, a dual-ear mount, two windscreens, two element covers, a moisture guard, a belt clip and a protective carrying case. The microphone is available in black and beige.

Wireless MicroSet® Description

The microphone is also available in a variety of wireless models, including the BP892cW. The BP892cW includes a 1.4 m (55") permanently attached miniature cable terminated with a locking 4-pin connector for use with Audio-Technica UniPak® body-pack transmitters. Models are also available in a variety of terminations for use with many other manufacturers' wireless systems (see below). No power module or belt clip is included (or required) with the wireless models. The wireless models' dimensions, polar pattern and included accessories are otherwise identical to those of the BP892.

The BP892cW is also available unterminated as the BP892c.

Cable Terminations

- BP892cW, BP892cW-TH – Terminated with locking 4-pin connector for use with A-T UniPak® body-pack transmitters
- BP892cL4, BP892cL4-TH – Terminated for Sennheiser® wireless systems using Lemo® connector
- BP892cLM3, BP892cLM3-TH – Terminated for Sennheiser® wireless systems using locking 3.5 mm connector
- BP892cT4, BP892cT4-TH – Terminated for Shure® wireless systems using TA4F-type connector

BP892cT5, BP892cT5-TH – Terminated for Lectrosonics® wireless systems using TA5F-type connector

BP892c, BP892c-TH – Unterminated

Model numbers ending in "TH" are beige.

Audio-Technica® is a registered trademark of Audio-Technica. Other product and company names mentioned herein may be trademarks and/or service marks of their respective owners.

Operation and Maintenance

The BP892 requires 11V to 52V phantom power for operation.

Output is low impedance (Lo-Z) balanced. The signal appears across Pins 2 and 3; Pin 1 is ground (shield). Output phase is "Pin 2 hot"—positive acoustic pressure produces positive voltage at Pin 2.

An integral 80 Hz high-pass UniSteep® filter provides easy switching from a flat frequency response to a low-end roll-off. The roll-off position reduces the microphone's sensitivity to popping in close vocal use. It also reduces the pickup of low-frequency ambient noise (such as traffic, air-handling systems, etc.), room reverberation and mechanically coupled vibrations. To engage the UniSteep® filter, use the end tip of a paperclip or other small pointed instrument to slide the switch toward the "bent" line.


The flexible design of the BP892 MicroSet enables it to be worn on either the left or right ear. Position the lightweight contoured loop around the back of your ear, so that the boom extends from the bottom of your ear. Bend the loop as needed to achieve a secure, comfortable fit, so that the MicroSet is not dislodged by shaking your head. Remove the MicroSet and bend a gentle curve in the microphone's boom. Hook the MicroSet back around your ear, and adjust the boom as needed to follow the contour of your face, positioning the microphone near the corner of your mouth. The microphone has a large acoustical sweet spot; experiment with placement near the corner of your mouth for optimal performance.

A cable clip is provided for strain relief, allowing the microphone to remain securely in place without the weight of the cable pulling on the headset. To install the cable clip, slip the cable into the snap-on connector and attach the clip to clothing, leaving enough slack on the MicroSet side of the clip to allow for free, comfortable motion.

The included AT8464 Dual-Ear Microphone Mount allows you to convert your single ear-worn BP892 MicroSet® to a dual-ear-worn unit. The BP892 fits on either side of the Dual-Ear Microphone Mount, allowing the microphone to be worn to either the left or right of your mouth. The headband easily adjusts to fit both children and adults.

How to use the Dual-Ear Microphone Mount

1. Insert the rounded end of your BP892 ear hook into the larger opening of your Dual-Ear Microphone Mount's left or right tapered holder. Firmly seat ear hook in the tapered holder.
2. Insert the small rounded end of the additional supplied ear hook into the larger opening of your Dual-Ear Microphone Mount's remaining tapered holder. Firmly seat ear hook in the tapered holder.
3. Open the Dual-Ear Microphone Mount's adjustable behind-the-neck headband to its maximum position by pushing the headband's adjusting tabs together (a). Put the behind-the-neck headband on, hooking the ear hooks over your ears. Adjust the fit of the headband as needed, by sliding the headband's adjusting tabs until you arrive at a secure, comfortable fit (a). Attach the microphone cable to the cable clip positioned between the headband's adjusting tabs (b).

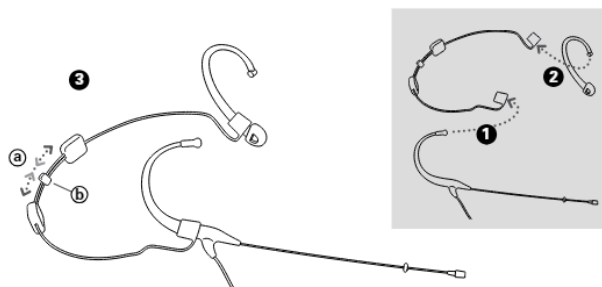

BP892 & BP892-TH

The donut-shaped moisture guard is provided to protect the element from sweat and moisture. Position the moisture guard as close to the element as possible to provide maximum protection. To remove the moisture guard, first remove the element cover and place it out of harm's way. Gently slide the moisture guard over the element. Replace the element cover.

Avoid leaving the microphone in the open sun or in areas where temperatures exceed 110° F (43° C) for extended periods. Extremely high humidity should also be avoided.

Architect's and Engineer's Specifications

The microphone shall be a fixed-charge condenser designed for headworn use. It shall have an omnidirectional polar pattern and a frequency response of 20 Hz to 20,000 Hz. The microphone shall operate from an external 11V to 52V DC phantom power source. It shall be capable of handling sound input levels up to 135 dB with a dynamic range of 104 dB. Nominal open-circuit output voltage shall be 3.5 mV at 1V, 1 Pascal. Output shall be low impedance balanced (250 ohms). The microphone shall be RoHS compliant.

The microphone shall have a 1.4 m (55") permanently attached miniature cable terminating in a locking 4-pin output connector. The output connector shall connect to a jack on the included power module. The output connector shall also connect to any Audio-Technica UniPak® body-pack wireless transmitter. The power module shall contain a recessed switch to permit choice of flat response or 80 Hz low-frequency roll-off. The output of the power module shall be a 3-pin XLRM-type connector.

The microphone shall be an under-ear headworn design with a diameter of 2.6 mm (0.10"). Microphone, boom and earpiece weight shall be 2.6 grams (0.09 oz). The microphone shall include a power module, a cable clip, a dual-ear mount, two windscreens, two element covers, a moisture guard, a belt clip and a carrying case. Finish shall be low-reflectance black [beige].


Wireless models of the microphone shall also be available, terminated for use with Audio-Technica UniPak® body-pack transmitters and a variety of other manufacturers' wireless systems. The wireless models' dimensions, polar pattern and included accessories (excluding power module and belt clip) shall be identical to those of the wired model. The microphone shall also be available unterminated.

The Audio-Technica BP892 [BP892-TH] is specified.


The Audio-Technica BP892cW [BP892cW-TH]; BP892cL4 [BP892cL4-TH]; BP892cLM3 [BP892cLM3-TH]; BP892cT4 [BP892cT4-TH]; BP892cT5 [BP892cT5-TH] (wireless version) is specified.

The Audio-Technica BP892c [BP892c-TH] (unterminated) is specified.

BP892, cW, cW-TH	cT4, cT4-TH	cT5, cT5-TH																																																
<table border="1"> <thead> <tr> <th>Pin</th> <th>Function</th> <th>Wire Color</th> </tr> </thead> <tbody> <tr> <td>Pin 1</td> <td>Ground/Shield</td> <td>Green</td> </tr> <tr> <td>Pin 2</td> <td>Instrument</td> <td>Jumper to Pin 1</td> </tr> <tr> <td>Pin 3</td> <td>Mic Audio</td> <td>Copper Color</td> </tr> <tr> <td>Pin 4</td> <td>Bias + In</td> <td>Red</td> </tr> </tbody> </table>	Pin	Function	Wire Color	Pin 1	Ground/Shield	Green	Pin 2	Instrument	Jumper to Pin 1	Pin 3	Mic Audio	Copper Color	Pin 4	Bias + In	Red	<table border="1"> <thead> <tr> <th>Pin</th> <th>Function</th> <th>Wire Color</th> </tr> </thead> <tbody> <tr> <td>Pin 1</td> <td>Ground/Shield</td> <td>Green</td> </tr> <tr> <td>Pin 2</td> <td>Bias + In</td> <td>Red</td> </tr> <tr> <td>Pin 3</td> <td>Mic Audio</td> <td>Copper Color</td> </tr> <tr> <td>Pin 4</td> <td>Source Load</td> <td>Jumper to Pin 3</td> </tr> </tbody> </table>	Pin	Function	Wire Color	Pin 1	Ground/Shield	Green	Pin 2	Bias + In	Red	Pin 3	Mic Audio	Copper Color	Pin 4	Source Load	Jumper to Pin 3	<table border="1"> <thead> <tr> <th>Pin</th> <th>Function</th> <th>Wire Color</th> </tr> </thead> <tbody> <tr> <td>Pin 1</td> <td>Ground/Shield</td> <td>Green</td> </tr> <tr> <td>Pin 2</td> <td>Bias + In</td> <td>Red</td> </tr> <tr> <td>Pin 3</td> <td>Mic Audio</td> <td>Copper Color</td> </tr> <tr> <td>Pin 4</td> <td>Source Load</td> <td>Jumper to Pin 1</td> </tr> <tr> <td>Pin 5</td> <td>Line In</td> <td>Open</td> </tr> </tbody> </table>	Pin	Function	Wire Color	Pin 1	Ground/Shield	Green	Pin 2	Bias + In	Red	Pin 3	Mic Audio	Copper Color	Pin 4	Source Load	Jumper to Pin 1	Pin 5	Line In	Open
Pin	Function	Wire Color																																																
Pin 1	Ground/Shield	Green																																																
Pin 2	Instrument	Jumper to Pin 1																																																
Pin 3	Mic Audio	Copper Color																																																
Pin 4	Bias + In	Red																																																
Pin	Function	Wire Color																																																
Pin 1	Ground/Shield	Green																																																
Pin 2	Bias + In	Red																																																
Pin 3	Mic Audio	Copper Color																																																
Pin 4	Source Load	Jumper to Pin 3																																																
Pin	Function	Wire Color																																																
Pin 1	Ground/Shield	Green																																																
Pin 2	Bias + In	Red																																																
Pin 3	Mic Audio	Copper Color																																																
Pin 4	Source Load	Jumper to Pin 1																																																
Pin 5	Line In	Open																																																



cLM3, cLM3-TH								
<table border="1"> <thead> <tr> <th>Function</th> <th>Wire Color</th> </tr> </thead> <tbody> <tr> <td>Sleeve</td> <td>Ground/Shield Green</td> </tr> <tr> <td>Ring</td> <td>Mic Audio Copper Color</td> </tr> <tr> <td>Tip</td> <td>Bias + In Red</td> </tr> </tbody> </table>	Function	Wire Color	Sleeve	Ground/Shield Green	Ring	Mic Audio Copper Color	Tip	Bias + In Red
Function	Wire Color							
Sleeve	Ground/Shield Green							
Ring	Mic Audio Copper Color							
Tip	Bias + In Red							



cL4, cL4-TH															
<table border="1"> <thead> <tr> <th>Pin</th> <th>Function</th> <th>Wire Color</th> </tr> </thead> <tbody> <tr> <td>Pin 1</td> <td>N/C</td> <td>Open</td> </tr> <tr> <td>Pin 2</td> <td>N/C</td> <td>Open</td> </tr> <tr> <td>Pin 3</td> <td>Bias + In, Mic Audio</td> <td>Red</td> </tr> <tr> <td>Shell/Case</td> <td>Ground/Shield</td> <td>Green</td> </tr> </tbody> </table>	Pin	Function	Wire Color	Pin 1	N/C	Open	Pin 2	N/C	Open	Pin 3	Bias + In, Mic Audio	Red	Shell/Case	Ground/Shield	Green
Pin	Function	Wire Color													
Pin 1	N/C	Open													
Pin 2	N/C	Open													
Pin 3	Bias + In, Mic Audio	Red													
Shell/Case	Ground/Shield	Green													


Specifications

Element	Fixed-charge back plate, permanently polarized condenser
Polar pattern	Omnidirectional
Frequency response	20-20,000 Hz
Low frequency roll-off	80 Hz, 18 dB/octave (wired only)
Open circuit sensitivity	-49 dB (3.5 mV) re 1V at 1 Pa
Impedance	250 ohms (wired only)
Maximum input sound level	135 dB SPL, 1 kHz at 3% T.H.D.
Dynamic range (typical)	104 dB, 1 kHz at Max SPL (wired only)
Signal-to-noise ratio¹	63 dB, 1 kHz at 1 Pa
Phantom power requirements	11-52V DC, 2 mA typical (wired only)
Current consumption	0.1 mA typical at 5V (wireless only)
Voltage range	2.5-11V (wireless only)
Switch	Flat, roll-off (wired only)
Weight	Microphone, boom & earpiece: 2.6 g (0.09 oz) Power module (wired only): 85 g (3.0 oz)
Dimensions	Microphone: 8.1 mm (0.32") long, 2.6 mm (0.10") diameter Boom: 98.4 mm (3.87") long, 1.07 mm (0.04") diameter Power module (wired only): 97.6 mm (3.84") long, 18.9 mm (0.74") diameter
Output connector (power module)	Integral 3-pin XLRM-type
Cable	1.4 m (55") long (permanently attached to microphone), 1.6 mm (0.06") diameter, 2-conductor shielded cable with locking 4-pin connector (wired only)
Audio-Technica case style	M31
Accessories furnished	BP892 AT8539 power module (wired only); AT8440 cable clip; AT8464 dual-ear mount; two AT8157 windscreens; two AT8156 element covers; moisture guard; belt clip (wired only); carrying case


In the interest of standards development, A.T.U.S. offers full details on its test methods to other industry professionals on request.
1 Pascal = 10 dynes/cm² = 10 microbars = 94 dB SPL
¹ Typical, A-weighted, using Audio Precision System One.
Specifications are subject to change without notice.



frequency response: 20–20,000 Hz



polar pattern



Audio-Technica U.S., Inc., 1221 Commerce Drive, Stow, Ohio 44224
Audio-Technica Limited, Old Lane, Leeds LS11 8AG England
©2010 Audio-Technica U.S., Inc. audio-technica.com

0001-0162-01