



LINO10

Column speaker 10 x 2"

Highlights:

- 10 x 2" high-quality broadband speakers

The LINO series are column speaker series designed for a wide variation of general purpose applications in acoustic difficult environments, ranging from speech and announcement applications to background music systems. Typical applications are houses of worship, auditoria, presentation rooms, public transportation hubs, ... and many more. They are solid constructed using solid aluminum materials and finished through a rigid finely perforated front grill. Mounting is done through an L-shaped bracket on top and bottom, offering optimal flexibility for fixation and directional placement. Connections are made through terminal block connections.

The LINO10 column speaker consists of 10 x 2" low/mid frequency drives with an 1" central positioned tweeter for the high frequencies. It reaches a power handling of 40 Watt, while a multi-tapping line transformer allows it to be connected in 70V/100V public address systems with power taps for 40W, 20W and 10W

Applications:

- Education
- Public facilities
- Corporate spaces
- Houses of worship



Voltage:




System specifications:

Drivers		10 x 2"
Connectors		5-pin Euro Terminal Block
Speaker type		Column speaker
Max. Power		80 W
RMS Power		40 W
Frequency	Response (± 3 dB)	170 Hz - 15 kHz
Sound Pressure (Max. W/1m)		92 dB

Product Features:

Colours		Black & White
Construction		Aluminum
Front finish		Aluminium grill

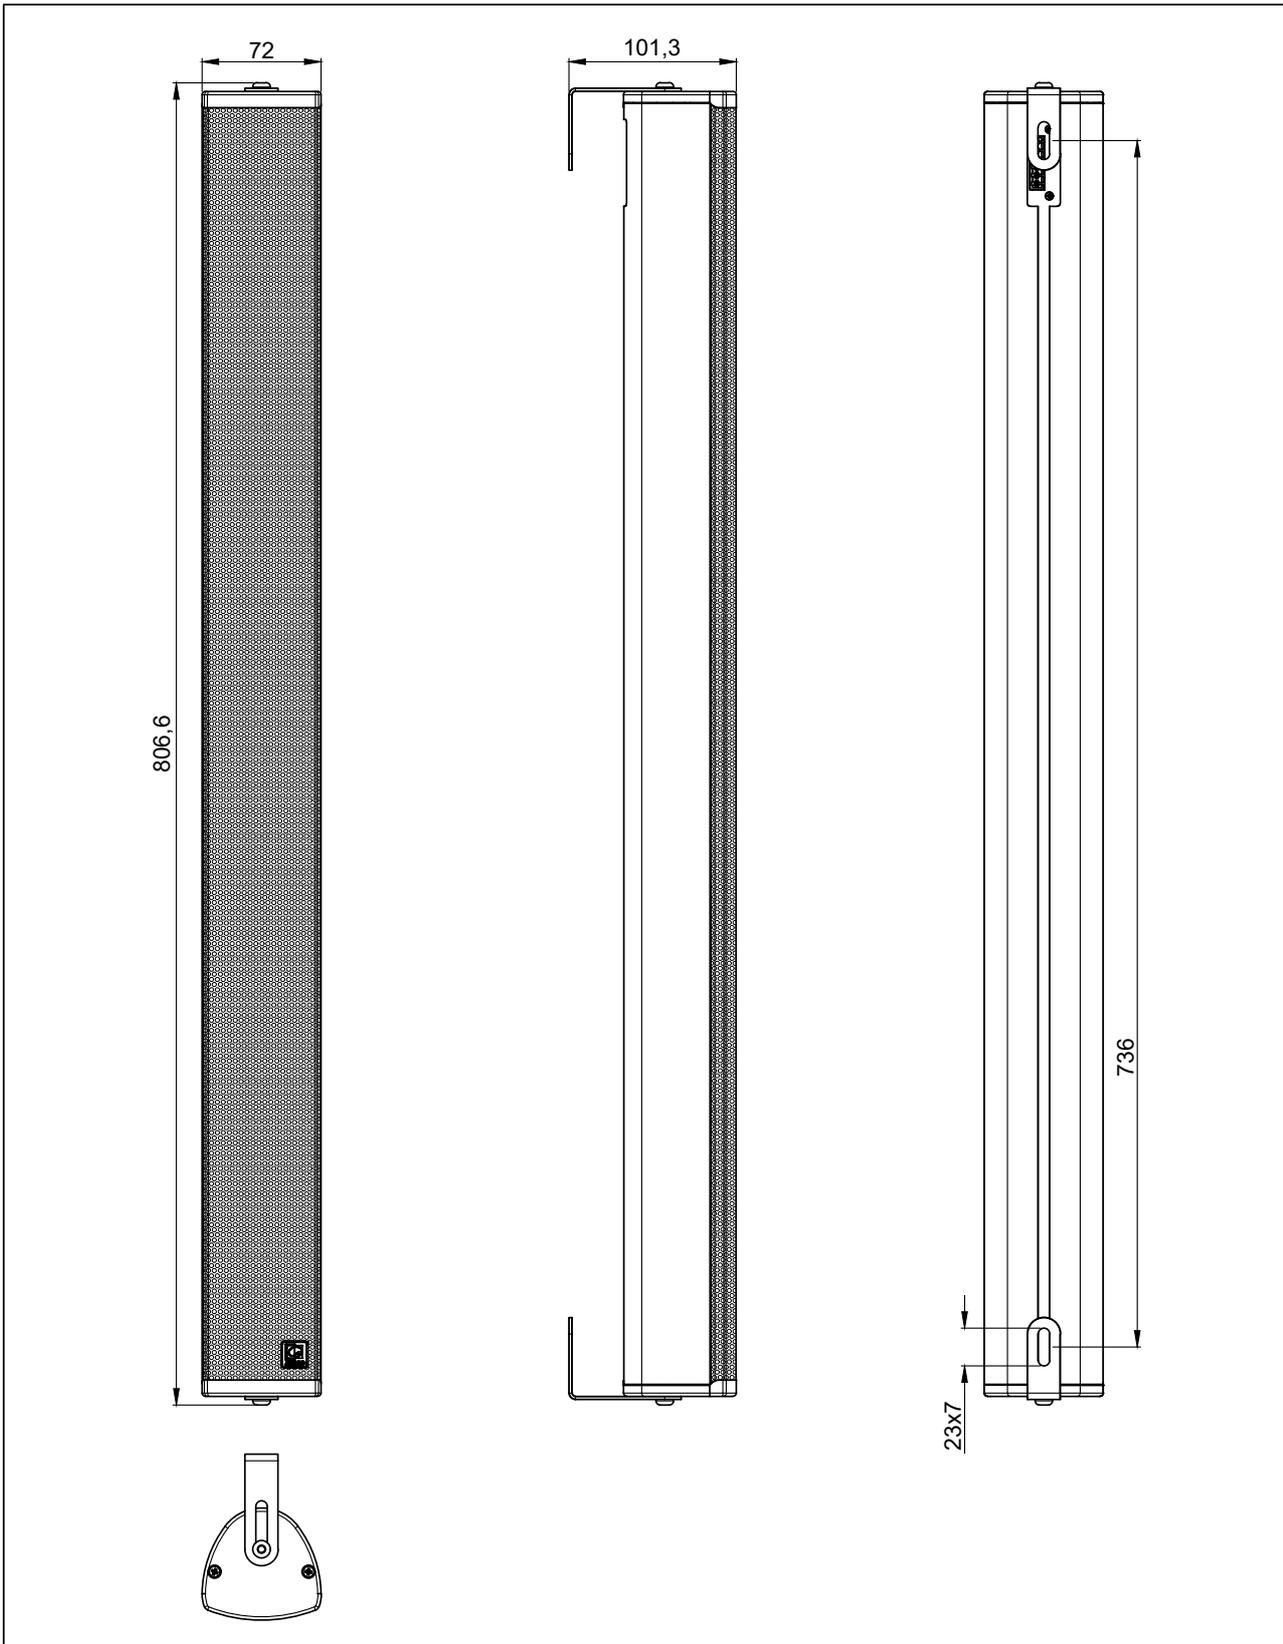

	LINO10		Product description: SLIM COLUMN SPEAKER 40 W - 70V/100V
	Weight: TBA	Outer dimensions: (w x h x d) 72 x 806,6 x 101,3	Unit height: N/A