



SUB 808-AS

HIGH-PERFORMANCE ACTIVE SUBWOOFER



Description SUB 808-AS is a compact low-profile high-performance active subwoofer. It features two vented-loaded 8" cone woofers powered by a 2000 Watts two-channel amplifier -one for each woofer- on a baltic birch plywood cabinet painted with black or white polyurea and weatherproof treatment. Management and tuning are available via RDNet software. The cabinet features rubber feet on two sides and two threaded pole-mounts for horizontal and vertical placement. Two stabilizing brackets make the vertical placement stable and firm. SUB 808-AS can be used stand-alone, in subwoofer arrays, or as the low-frequency complement for KX 515-A speaker.

- Features**
- › 129 dB max SPL
 - › 40 Hz to 400 Hz frequency range
 - › 2 x 8" neodymium woofers, 2.5" v.c.
 - › 2000 W Class-D Amplifier
 - › RDNet Networked Management
 - › Bass Motion Control excursion management
 - › powerCON TRUE1 TOP mains connectors
 - › Available in full black or white coating

Part Number	13000871	SUB 808-AS W	US	100-120 V	White	EAN 8024530021924
	13000872	SUB 808-AS W	EU	220-240 V	White	EAN 8024530022075
	13000898	SUB 808-AS	US	100-120 V	Black	EAN 8024530022877
	13000899	SUB 808-AS	EU	220-240 V	Black	EAN 8024530022785
	13000953	SUB 808-AS	UK	220-240 V	Black	EAN 8024530023362
	13000955	SUB 808-AS W	UK	220-240 V	White	EAN 8024530023379



SUB 808-AS


HIGH-PERFORMANCE ACTIVE SUBWOOFER

Line Art 2D



SUB 808-AS

HIGH-PERFORMANCE ACTIVE SUBWOOFER

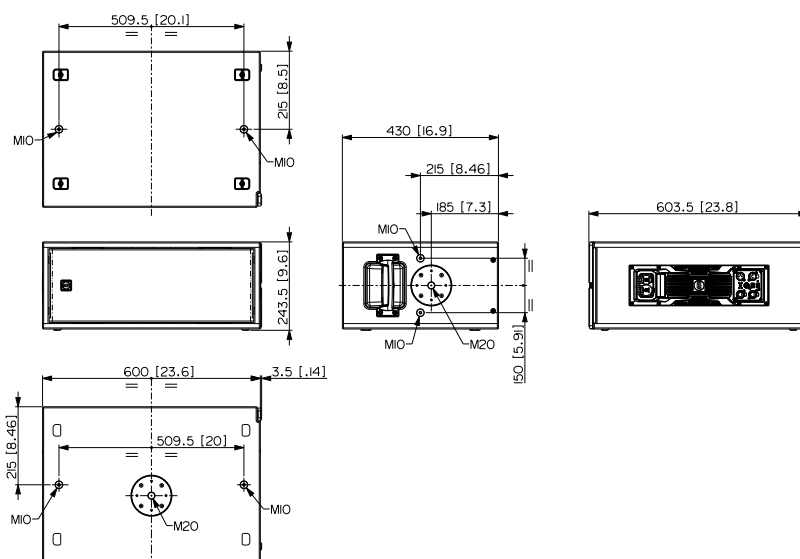

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response	40 Hz - 400 Hz
	Max SPL @ 1m	129 dB
Transducers	Woofer	2 x 8" neo, 2.5" v.c
Input/Output section	Input signal	bal/unbal
	Input connectors	XLR, RDNet Ethercon
	Output connectors	XLR, RDNet Ethercon
	Input sensitivity	-2 dBu/+4 dBu
Processor section	Protections	Excurs.
	Limiter	Fast Limiter
	Controls	Volume
	RDNet	Onboard
Power section	Total Power	2000 W Peak
	Low frequencies	2000 W Peak
	Cooling	Convection
	Connections	Powercon TRUE1 TOP IN/OUT
Standard compliance	Safety agency	CE compliant
Physical specifications	Cabinet/Case Material	Baltic birch plywood
	Hardware	2X M20 TOP AND SIDE 8X M10 2X SIDE
	Handles	1 X SIDE
	Pole mount/Cap	35 mm insert
	Grille	Steel with clothing
	Color	Black, White



SUB 808-AS

HIGH-PERFORMANCE ACTIVE SUBWOOFER

Size / Weight	Height	243.5 mm / 9.59 inches		
	Width	603.5 mm / 23.76 inches		
	Depth	430 mm / 16.93 inches		
	Weight	20 kg / 44.09 lbs		
Rigging / Mounting	ACCESSORIES			
	HORIZONTAL BRACKETS			
	13360709	HBR60709	Black	EAN 8024530023058
	POLE MOUNT KITS			
	13360232	AC PMX		EAN 8024530010058
	13360638	PM-KIT M20	White	EAN 8024530022303
	13360067	PM-KIT M20	Black	EAN 8024530014599
	COVERS			
	13360708	CVR60708	Black	EAN 8024530022884
	RAIN PROTECTIONS			
Protections	13360689	RPR60689	Black	EAN 8024530022914
	CABLES KIT			
Cables	13360102	AC XLR 3M3F		EAN 8024530006402