




DUP 5EN

WALL MOUNT UNIVERSAL PLASTIC SPEAKER

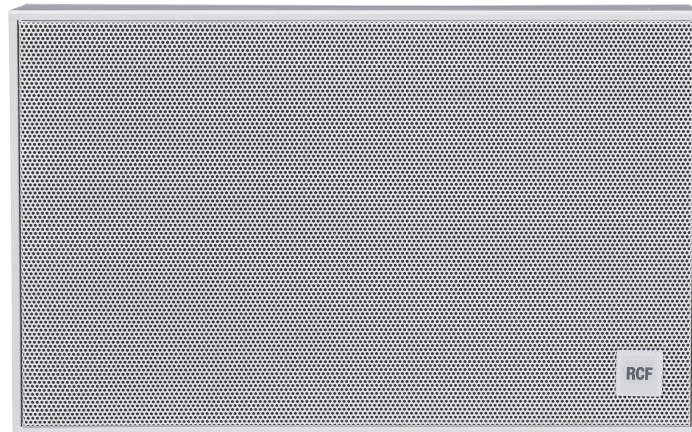

Description	DUP 5EN is a universal speaker designed for wall installation. It is especially suitable for broadcasting alarm messages thanks to the highly intelligible sound reproduction and its resistance to high temperatures reached during fires. The terminal connection blocks, for input and output flameproof cables, are made of ceramic material. A thermal fuse protects the integrity of the line in case of heat affecting the speaker. Cables inside speaker made using flameproof leads.
--------------------	---

- | | |
|-----------------|--|
| Features | <ul style="list-style-type: none">› 5.5" fullrange transducer.› Power selectable (100 V): 6 W – 3 W – 1.5 W.› 92 dB sensitivity.› Colour white RAL 9016.› Plastic body and steel grille.› In/out ceramic terminal block.› Thermal fuse protection. |
|-----------------|--|


Part Number	13100019 DUP 5EN	White - RAL 9016 EAN 8024530014759
--------------------	--------------------	--------------------------------------



DUP 5EN

WALL MOUNT UNIVERSAL PLASTIC SPEAKER

Line Art 2D

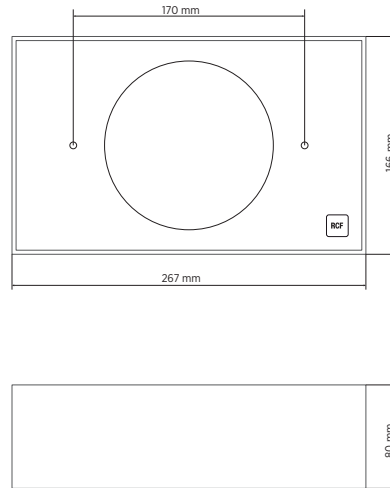

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response (-10dB)	130 Hz - 17000 Hz
	Max SPL @ 1m	100 dB
	Max SPL @ 4m	88 dB
	Coverage angle	180°
	System Sensitivity	92 dB
	System Sensitivity 1W @ 4m	80 dB
Power section	Power Handling	6 W
	Peak Power Handling	24 W PEAK
	Protections	Thermal fuse
	Recommended Amplifiers	DXT 3000, DXT 4000, DXT 7000
Transducers	Fullrange	1 x 5.5"
Input/Output section	Input connectors	Ceramic screw terminals
	Output connectors	Ceramic screw terminals
	Constant Voltage Transformer	100 V
	Power selection 1	6 W - 1667 ohm
	Power selection 2	3 W - 3333 ohm
Standard compliance	Power selection 3	1.5 W - 6667 ohm
	Safety agency	CE compliant
	EN54-24 certified	Yes
	CPR number	0068-CPPR-085/2017
Physical specifications	Cabinet/Case Material	ABS
	Grille	Steel
	Color	White - RAL 9016



DUP 5EN

WALL MOUNT UNIVERSAL PLASTIC SPEAKER

Size / Weight	Height	166 mm / 6.54 inches
	Width	267 mm / 10.51 inches
	Depth	80 mm / 3.15 inches
	Weight	1.15 kg / 2.54 lbs