



KX 32-A

HIGH-PERFORMANCE 2-WAY POINT-SOURCE ACTIVE
SPEAKER



Description

The KX 32-A is a compact, high-output 2-way active speaker system engineered for professional users, combining precise directivity, high SPL capability, and advanced system integration. The low-frequency section features a 12" neodymium driver in a bass-reflex design; the high-frequency section comprises a neodymium compression driver with a 3" titanium dome, coupled to a 100° x 70° True Resistive Waveguide, rotatable by 90° to ensure flexible coverage options. An integrated two-channel 3200 W Class D amplifier with proprietary DSP processing and remote management via RDNet enables optimal system performance. Its weatherproof, multifunctional enclosure with Quick Lock Pins and M10 inserts supports versatile deployment for ground-stacked, pole-mounted, or flown applications.

Features

- › 134 dB Max SPL
- › Rotatable 100° x 70° TRW horn
- › 12" neodymium woofer, 3.5" voice coil
- › 3.0" Ti dome, neodymium compression driver
- › 2 channel, 3200 W Class D Amplifier
- › DSP Processing with FIRPHASE and BMC
- › RDNet Networked Management
- › powerCON TRUE1 TOP mains connectors

Part Number


13000903 KX 32-A	US	100-240 V	Black	EAN 8024530022693
13000904 KX 32-A	EU	100-240 V	Black	EAN 8024530022709



KX 32-A

HIGH-PERFORMANCE 2-WAY POINT-SOURCE ACTIVE SPEAKER

Line Art 2D

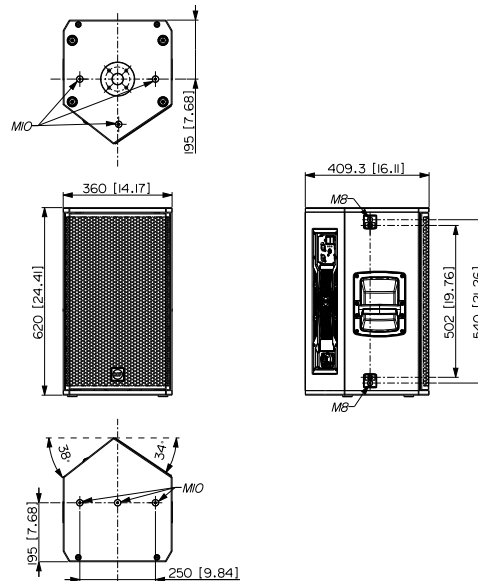

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response	50 Hz - 20000 Hz
	Max SPL @ 1m	134 dB
	Horizontal coverage angle	100°
	Vertical coverage angle	70°
Transducers	Compression Driver	1.4" neo, 3.0" v.c
	Woofer	12" neo, 3.5" v.c
Input/Output section	Input signal	bal/unbal
	Input connectors	XLR, RDNet Ethercon
	Output connectors	XLR, RDNet Ethercon
	Input sensitivity	-2 dBu/+4 dBu
Processor section	Crossover Frequencies	750Hz
	Protections	Thermal, HF
	Limiter	Fast Limiter
	Controls	Gain Reduction, Proces., 8 sel. presets
Power section	RDNet	Onboard
	Total Power	3200 W Peak
	High frequencies	1200 W Peak
	Low frequencies	2000 W Peak
	Cooling	Convection
	Connections	Powercon TRUE1 TOP IN/OUT
Standard compliance	Safety agency	CE compliant



KX 32-A

HIGH-PERFORMANCE 2-WAY POINT-SOURCE ACTIVE SPEAKER

Physical specifications	Cabinet/Case Material	Baltic birch plywood			
	Hardware	Quick lock, pole mount, 3 x M10 on top, 3 x M10 on bottom sides			
	Handles	2 on side			
	Pole mount/Cap	35 mm insert			
	Grille	Steel with clothing			
	Color	Black			
	Size / Weight	Height	620 mm / 24.41 inches		
Width		360 mm / 14.17 inches			
Depth		409.3 mm / 16.11 inches			
Weight		23.65 kg / 52.14 lbs			
Rigging / Mounting	ACCESSORIES				
	FLOOR STANDS				
	13360109	AC PRO-FS	Black	EAN 8024530006471	
	HORIZONTAL BRACKETS				
	13360703	HBR60703	Black - RAL 9005	EAN 8024530023843	
	13360702	PLT60702	Black	EAN 8024530023089	
	POLE MOUNT KITS				
	13360232	AC PMX		EAN 8024530010058	
	13360110	AC PRO-PM	Black	EAN 8024530006488	
	13360067	PM-KIT M20	Black	EAN 8024530014599	
	VERTICAL BRACKETS				
	13360704	VBR60704	Black	EAN 8024530023096	
	WALL MOUNT BRACKETS				
	13360539	WM-BR 001	Black - RAL 9005	EAN 8024530021344	
	Protections	COVERS			
		13360699	CVR60699	Black	EAN 8024530023065
		RAIN PROTECTIONS			
		13360651	RPR60651	Black	EAN 8024530025069
	Cables	CABLES			
		12399019	CBL ETHERCON TO XLR F 0.2M	Black	EAN 8024530013882
12399020		CBL ETHERCON TO XLR M 0.2M	Black	EAN 8024530013899	
CABLES KIT					
13360102		AC XLR 3M3F		EAN 8024530006402	
12399016		CBL ETHERCON 0.7M	Black	EAN 8024530013844	
12399017		CBL ETHERCON 1.5M	Black	EAN 8024530013851	
12399035		CBL ETHERCON 3M	Black	EAN 8024530013868	
12399018		CBL ETHERCON 5M	Black	EAN 8024530013875	