



KYRA12

Design column speaker 12 x 2"

Highlights:

- Multi-tapping 100V line transformer
- Multi-functional wall bracket allowing swiveling and down-tilting
- Slimline aluminum design
- 12 x 2" high-quality broadband speakers

The KYRA12 design column speaker consists of 12 x 2" high-quality aluminum cone full-range drivers, delivering extraordinary clarity and detailed sound. The overall continuous power handling reaches 120 Watt and the beamwidth of 170° x 20° makes it the perfect match for acoustically difficult venues, reducing echo and microphone feedback which optimizes the speech intelligibility in reverberant venues.

A multi-tapping line transformer allows it to be connected to 70V/100V public address systems with different power taps for 40W, 20W and 10W and/or low impedance (10Ω) systems.

Applications:

- Education
- Public facilities
- Corporate spaces
- Houses of worship
- Events



Impedance:



Voltage:




System specifications:

Speaker type		Broadband column
Max. Power		240 W
RMS Power		120 W
Impedance		12 Ω
Sensitivity (1W/1m)		92 dB
Sound Pressure (Max. W/1m)		113 dB
Frequency	Range (-10 dB)	120 Hz - 20 kHz
Drivers		12 x 2"
Line Transformer Tappings	1	40 W - 125 Ω (70V)
	2	250 Ω - 100 V / 40 W - 70 V / 20 W
	3	500 Ω - 100 V / 20 W - 70 V / 10 W
	4	1000 Ω - 100 V / 10 W - 70 V / 5 W
Ingress Protection rating		IP3x
Temperature	Operating	-20 - +50 °C
Incline angle	Left	42°
	Right	42°
	Bottom	13°

Product Features:

Front finish		Steel grill
Construction		Aluminium with plastic side covers
Dimensions		70 x 1006 x 101 mm (W x H x D)
Colours		Black (KYRA12/B - RAL9005)
		White (KYRA12/W - RAL9003)
Accessories	Included	2-way Revolving mounting bracket
		1 x 3-pin Euro Terminal Block Input connectors

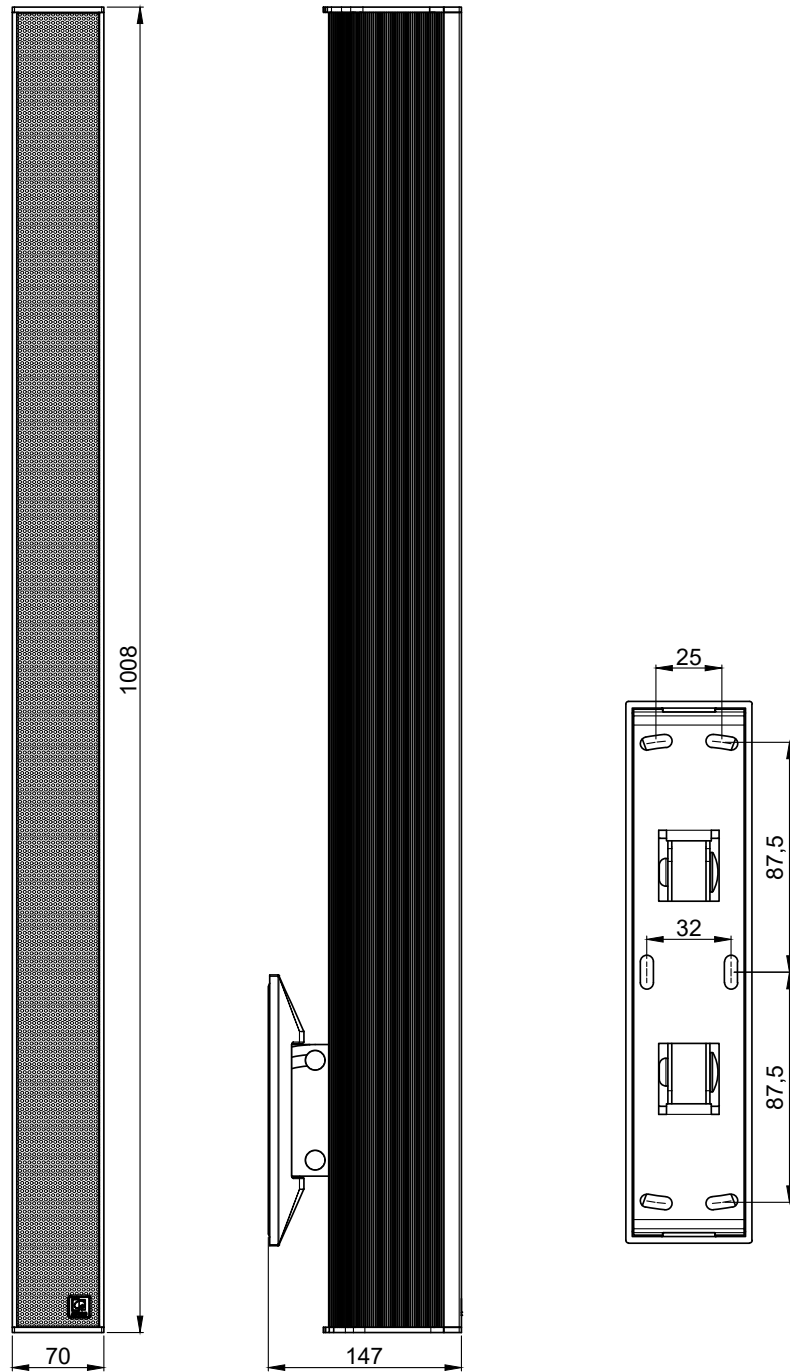

KYRA12

Product description:

DESIGN COLUMN SPEAKER 120W - 70V/100V & 12 OHM

Weight:

4,3 kg

Outer dimensions:
(w x h x d)

70 x 1008 x 147

Unit height:

N/A