




EVOX J11

ACTIVE THREE-WAY PORTABLE COLUMN SPEAKER

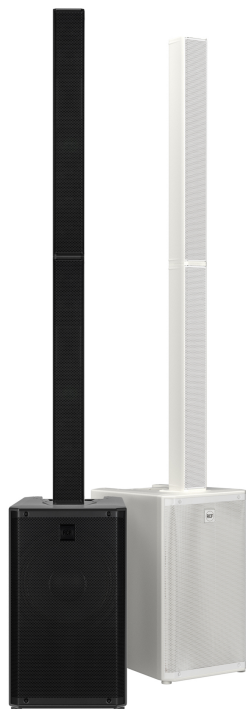

Description EVOX J11 is an active, three-way portable column system designed for maximum clarity and power in a compact format. A 1.75" compression driver coupled with a 120° × 40° True Resistive Waveguide ensures wide, consistent coverage, while 12 x 3" full-range transducers and a high-power 12" woofer in a bass-reflex enclosure deliver articulate mids and deep, controlled lows. Driven by a 3500W onboard dual-channel Class-D amplifier, EVOX J11 delivers an impressive 132 dB Max SPL output. Part of the EVOX J Series, it incorporates RCF's tour-grade technology into a sleek, unobtrusive package that delivers crystal-clear vocals, natural musical response, and effortless deployment for bands, DJs, and live performers.

- Features**
- › 132 dB Max SPL
 - › 3500 W Class-D Amplifier - Built-In DSP
 - › 1.75" Neo Compression Driver - 120° X 40° True Resistive Waveguide
 - › 12 × 3" Full-Range Neo Transducers
 - › 12" High-Power Woofer
 - › Enhanced Coverage And Clarity
 - › Composite Cabinet
 - › Sleek, Road-Ready Design
 - › Top Speaker Padded Carrying Bag Included
 - › J11 Sub: 20,6 kg - 45.42 lb / J11 Top: 8.4 kg - 18.52 lb

Part Number	13000932	EVOX J11	220-240 V	Black	EAN 8024530024147
	13000933	EVOX J11	100-120 V	Black	EAN 8024530024185
	13000987	EVOX J11 W	220-240 V	White - RAL 9003	EAN 8024530024451
	13000988	EVOX J11 W	100-120 V	White - RAL 9003	EAN 8024530024482



EVOX J11


ACTIVE THREE-WAY PORTABLE COLUMN SPEAKER

Line Art 2D



EVOX J11

ACTIVE THREE-WAY PORTABLE COLUMN SPEAKER

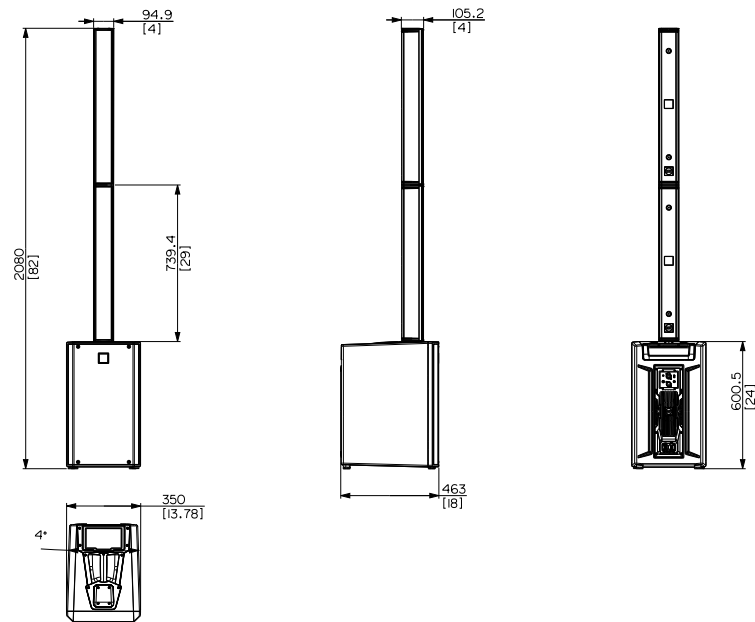

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response	37 Hz - 20000 Hz
	Max SPL @ 1m	132 dB
	Horizontal coverage angle	120°
	Vertical coverage angle	40°
Transducers	Compression Driver	1 x 0.75" neo, 1.75" v.c
	Fullrange	12 x 3.0" neo, 1.0" v.c
	Woofer	1 x 12", 2.5" v.c
Input/Output section	Input signal	bal/unbal
	Input connectors	Combo XLR/Jack
	Output connectors	XLR
	Input sensitivity	+4 dBu
Processor section	Crossover Frequencies	160 Hz/1800 Hz
	Protections	Thermal, RMS
	Limiter	Soft Limiter
	Controls	Volume, Presets: LINEAR/LIVE, CLUB, VOICE
Power section	Total Power	3500 W Peak
	High frequencies	1500 W Peak
	Low frequencies	2000 W Peak
	Cooling	Convection
	Connections	Powercon TRUE1 TOP IN/OUT
Standard compliance	Safety agency	CE compliant



EVOX J11

ACTIVE THREE-WAY PORTABLE COLUMN SPEAKER

Physical specifications	Cabinet/Case Material		PP Composite		
	Handles		1 Top		
	Pole mount/Cap		Quick-fit socket		
	Grille		Steel		
	Color		Black, White - RAL 9003		
	Size / Weight	Height		2080 mm / 81.89 inches	
		Width		350 mm / 13.78 inches	
		Depth		463 mm / 18.23 inches	
		Weight		29 kg / 63.93 lbs	
Rigging / Mounting	ACCESSORIES				
	FLOOR STANDS				
	13360768	PMK60768	Black - RAL 9005	EAN 8024530025083	
	13360770	PMK60770	White - RAL 9003	EAN 8024530025090	
Protections	COVERS				
	13360751	CVR60751	Black	EAN 8024530024536	
	13360752	CVR60752	Black	EAN 8024530024543	